

Product Specification

Display

Panel Size	65"
Panel Type	TFT LCD Module with DLED Backlight.
Display Area	H1428.5 mm x V803.5 mm
Aspect Ratio	16:9
Resolution	UHD 3840 x 2160 (pixels)
Colours	1.07B colours (10 bit)
Brightness	400 nits (typ.) - 450 nits (max)
Contrast Ratio	1200:1 (typ.) / 5000:1 (DCR enable)
Response Time	6.0ms
Viewing Angles	H = 178, V=178 typ
Backlight Life	50,000 Hours (Typy)
Surface Treatment	Hardness: 9H with Anti-Fingerprint coating & Anti-glare coating

Platform

Processor	ARM Cortex-A73*4
RAM	4 GB (Spec 1A & 1ANEP) / 8 GB (Spec 1B)
Storage	32 GB (Spec 1A & 1ANEP) / 64 GB (Spec 1B)

Touch

Type / Tech	Ultra Fine Touch Technology
Touch Resolution	32767 x 32767
Touch Point	Windows: 33 points of touch Android: 20 points of touch

ViewSonic 52 Series

Input

HDMI	3 x 2 x (3840 x 2160 @ 60Hz, HDCP2.2, CEC, Front x 1, Side x 1) 1 x (3840 x 2160 @ 60Hz, HDCP2.2, CEC, ARC, Side x 1)
RGB / VGA	1 x (1920 x 1080 @ 60Hz)
Display Port	1 x (3840 x 2160 @ 60Hz)
Audio	1 x (PC Audio in)
RS232	1 x
OPS	1 x module slot
WiFi	1 x module slot

Output

HDMI	1 x (Spec 1A & 1B)
Audio	1 x (Earphone out)
SPDIF	1 x (Optical)

USB

Type A 2.0	1 x (Side)
Type A 3.0	4 x (Front x 2, Side x 2, SmartPort™ USB)
Type B	2 x for touch
Type C	1 x (DP 1.2 Alt Mode, USB 3.0, PD65W, Ethernet)

Product Specification

LAN

RJ45 x 1

Speakers

15W x 2

15W Subwoofer x 1

Microphone

Built-in 8 array microphone

Ergonomics

Wall Mount

600 mm x 400 mm (VESA®)

Embedded OS

Android 9 (Android 11 upgradable)

Bundle Software

Basic Annotation

myViewBoard

Software

Pro Annotation

myViewBoard Whiteboard for Windows

Software

(Embedded in optional Windows Slot-in PC)

Wireless Presentation

vCast/myViewBoard Display App

Special Features

All in one USB-port

USB 3.0 x 4

Simple LAN sharing

10/100/1000M for Android and PC

between IFP and slot in device

Light Sensor

Yes

ViewSonic 52 Series

Operating Conditions

Temperature

0°C to 40°C

Humidity

20% ~ 80% RH non-condensing

Power

Voltage

100 - 240VAC +/- 10% Wide Range

Consumption

On: 135.7W (typ)

Off: ≤ 0.5W

Weight

Net

43.9 KG

Gross

55.4 KG

Regulations

cTUVus / FCC / EPEAT / Mexico coc / Mexico Energy / RoHS / Energy Star 8 / CEC / EMC/CE / CE / RoHS & DOC / REACH / WEEE / ErP / EEI / RCM / BIS / PSE / VCCI / CCC / CECP

Compatible Slot-in PC

VPC12 / VPC25-O / VPC27-O / VPC25-O-B / VPC27-O-B

Dimensions

Physical

L1720.1 mm x H1069.6 mm x D118.4 mm


Packaging

L1880 mm x H1160 mm x D280 mm

Product Specification

What's in the box?

- Power Cord (3m)
- Remote Control with AAA batteries
- USB Type-C Cable (1.5m)
- Touch USB cable (3m, USB 2.0)
- Touch Pen x 2
- Eraser
- Quick Start Guide
- Compliance Statement
- RS232 adapter
- Screw x 8 (Camera 2+2, Wall Mount 4)
- HDMI cable
- Clamp x 5
- Camera Plate x 1

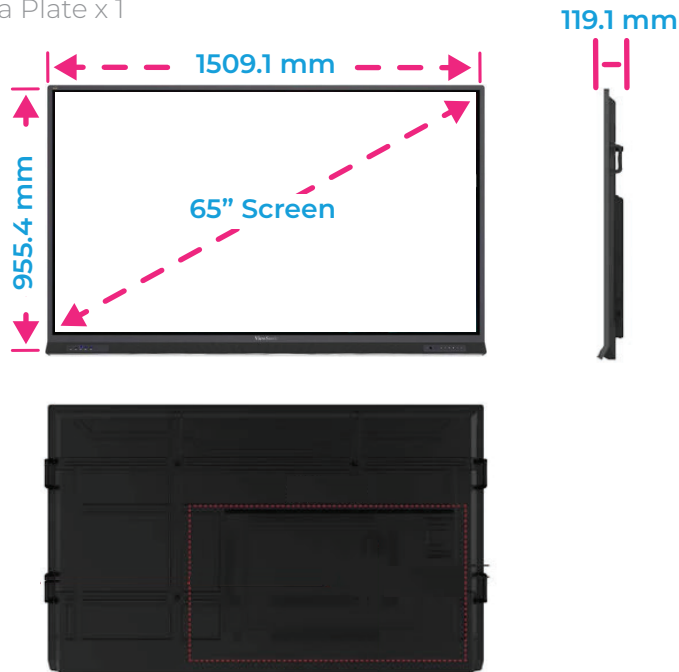

ViewSonic 52 Series

