

ViewSonic ePoster EP5542T

All-in-One Touch Digital ePoster

ViewSonic®

With 10-point interactive touch, this uber-sleek and slim freestanding ViewSonic EP5542T is ideal for high-impact visual messaging. Designed with a scratch-proof glass faceplate for added durability, it delivers unsurpassable visibility regardless of dust or ambient light, projecting crisp, vivid images and videos to engage the crowd.

Engage your Audience

Exceptional picture quality, with superb processing power via a built-in quad-core media player and backed up by built-in speakers.

Easy to install

Effortless integrated device and content management. Slim, freestanding design for modern settings, blending seamlessly into any environment, while able to throw out engaging content to your crowd.



Interactivity

With 10-point touch, your audience can engage, interact and navigate their own journey with your content on the screen.

Remotely Maintain

Total remote control with RS232 commands within local area network. Manage content and multiple devices wherever via the vController app integrated with RS232 and LAN command.

ViewBoard

Perfect picture quality



With exceptional 4K Ultra HD resolution, this sleek display delivers immersive, audience engaging content, enhanced with a scratch-proof, anti-glare 7H tempered glass faceplate, delivering an impactful viewing experience, regardless of ambient light, year after year.

Built for complete security



Comes with a lockable door, allowing you to hold an additional PC or media player securely. Integrated with a built-in power supply, you can charge the additional device without the need of external outlets or fussy cables.

Convenient connectivity and playback



Deliver compelling content instantly with plug-&-play. Store your images, videos, and music onto your portable USB drive and connect to the ePoster for instantaneous playback. 10-point interactive touch adds further interactivity to your content.

Streamlined device management



With the user-friendly on-screen interface you can manage connected devices with vController™ software, enabling easy scheduling and OSD control capabilities, such as on-and-off settings, audio, and display signal source.


ViewBoard EP5542T

Powerful Performance




Experience superb performance and storage, boasting seamless content playback without any external media player. With ViewSonic's Embedded Signage platform, enjoy easy development, reinforced capability with multiple web formats and standards, and secured protection.

Timed to your convenience



Schedule captivating photos and videos to your preferred time and date with a user-friendly interface. Available onscreen, you can fix the device's operation & content playback hours at your finger tips.

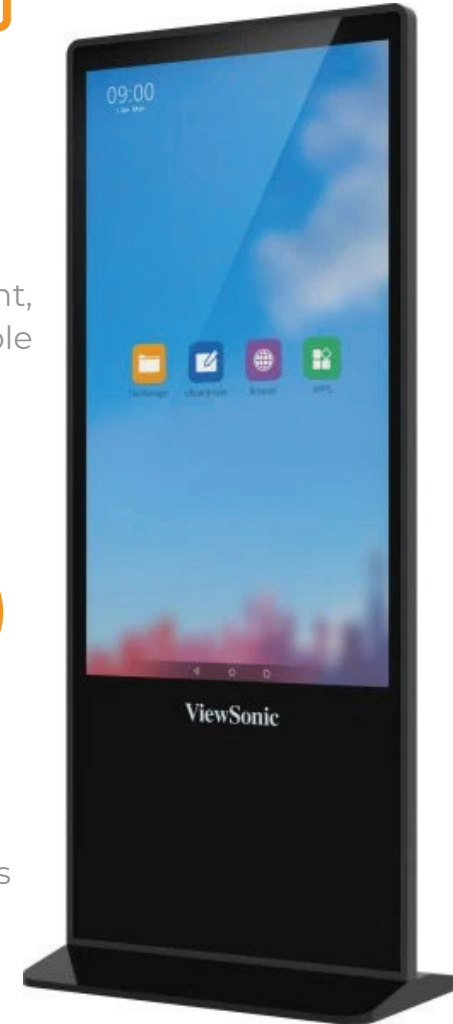

Product Specification

Display

Panel Size	55"
Panel Type	TFT LCD (VA type, DLED Backlight)
Display Area	H1209.6 mm x V680.4mm
Aspect Ratio	9:16
Resolution	2160 x 3840 pixels
Colours	1.07B
Brightness	450 nits (typ.)
Contrast Ratio	1300:1 (typ.)
Response Time	9.0ms (typ. G to G)
Viewing Angles	H = 178, V=178 typ
Backlight Life	30,000 Hours (Typ)
Surface Treatment	7H Tempered Glass
Orientation	Portrait

Touch

Type / Tech	IR Recognition
Touch Resolution	32768 x 32768
Touch Point	10 points

USB

Type A	x 3 (2.0)
Type B	x 2 (for touch module)

Speakers

Type A	10W x 2
---------------	---------

ViewSonic EP5542T

Input

HDMI	x 3 (Type 2.0)
RGB / VGA	x 1
Display Port	x 1 (1.2)
Audio	x 1 PC Audio in (3.5 mm)
RS232	x 1

Output

Audio	x 1 (Earphone out)
SPDIF	x 1

LAN

RJ45	x 1
-------------	-----

Speakers

10W x 2

Compatibility

RGB PC/HDMI PC	1920 x 1080 @ 60Hz
HDMI	2160 x 3840 @ 60Hz
Display Port	2160 x 3840 @ 60Hz

Multimedia

Image	JPG, BMG, PNG
Video	MP4, MOV, MKV, DAT, MPG, MPEG, AVI, TS, WMV, RM, RMVB
Audio	MP3, WAV, AAC

Product Specification

Operating Software

Android Version 8

Operating Conditions

Temperature 0°C to 40°C

Humidity 20% ~ 80% non-condensing

Dimensions

Physical W768.5 mm x H1870 mm x D450 mm

Packaging W970 mm x H2034 mm x D609 mm

Weight

Net 62.7kg

Gross 74.7kg

ViewSonic EP5542T

Power

Voltage

100 - 420VAC +/- 10% Wide Range

Consumption

Normal - 126W

Maximum - 149W

Off - < 0.5W

Regulations

cTUVus, FCC, Energy Star, CE, CB, RoHS, ErP, EEI, WEEE, BSMI

Bundle Software

Revel Digital, SureMDM

Package Contents

Power Cord

Remote Control with battery

Quick Start Guide

Key

